

SKALA

FOR SOLAR FAÇADES



SKALA

- is a glass-glass module without disturbing frame
- has an opaque black color as standard version
- does not need mechanical clamping on the front glass due to its backrail system fitting to all common façade substructures
- is most suitable for rainscreen ventilated façades
- can be combined with a variety of other façade materials
- can be installed in portrait and landscape format (depends on regional building regulations)
- has the general technical building approval (abZ) from Deutsches Institut für Bautechnik (DIBt)
- is developed and produced in Germany – approved according to all relevant certifications
- is available in different colors and sizes:



SKALA


Valid for product variant 4.4

MECHANICAL SPECIFICATIONS

SKALA	Value
External dimensions	1,587 x 664 mm ²
Thickness	38 mm
Weight	17 kg
Cell type	CIGS
Frame	none
Front cover	3.0 mm / 3.2 mm tempered glass
Design load (safety factor 1.5)	upward 1600 Pa downward 3400 Pa
Junction box protection class	IP67
Dimensions of the junction boxes	60 x 60 x 11.5 mm ³
Cable lengths (⊖ plug ⊕ socket)	200 320 mm
Cable cross section	2.5 mm ² minimal bending radius: 6x outer diameter
Connector type	H4
Fire rating	Class C (ANSI/UL 790:2004)



- Design qualification and type approval: IEC 61215:2016
- Safety qualification: IEC 61730:2016
- Safety standard: UL 61730 (Pending)
- Salt mist corrosion: IEC 61701 (Pending)

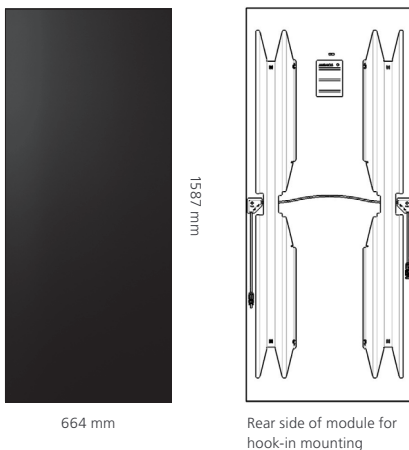

ELECTRICAL SPECIFICATIONS

Data measured under standard test conditions (STC):

SKALA color code	B001 G001	G003	4002 3001 7001	3002
Nominal power P_{nom}^*	140W	135W	130W	120W
Sorting	-0/+10 W			
Module efficiency η	13.3 %	12.8 %	12.3 %	11.4 %
Aperture efficiency η	14.7 %	14.2 %	13.6 %	12.6 %
Open-circuit voltage V_{oc}^*	79.5V	78.9V	78.3V	77.1V
Short-circuit current I_{sc}^*	2.51A	2.44A	2.37A	2.23A
Voltage at mpp V_{mpp}^*	61.9V	61.6V	61.3V	60.3V
Current at mpp I_{mpp}^*	2.26A	2.19A	2.12A	1.99A
Max. over-current protection I_R	4.0 A			
Max. system voltage V_{sys}	1000V			

Irradiance of 1000W/m² on the module area, module temperature 25°C and a spectral distribution of the sunlight according to the atmospheric mass (AM) 1.5.

* Tolerance of manufacturing: -5 %/+10 %

Data measured at nominal module operating temperature (NMOT)** and AM 1.5:

SKALA	120	130	135	140
NMOT	40 °C			
Nominal power P_{nom}	90W	97W	101W	105W
Open-circuit voltage V_{oc}	73V	74V	75V	76V
Short-circuit current I_{sc}	1.78A	1.90A	1.95A	2.01A
Voltage at mpp V_{mpp}	57V	58V	58V	58V

** NMOT: Module operating temperature at light intensity of 800W/m² on the module area, air temperature 20°C, wind speed 1m/s and operating at mpp.

Temperature coefficients:

SKALA	Value
Temperature coefficient P_{nom}	-0.39 %/°C
Temperature coefficient V_{oc}	-230 mV/°C
Temperature coefficient I_{sc}	0 mA/°C

Data measured at low light intensity:

The relative reduction of the module efficiency at a light intensity of 200 W/m² is 6%, compared to 1000 W/m² at 25°C module temperature and spectrum AM 1.5. At 500 W/m², the relative increase of module efficiency is +1%.

As a result of ongoing research and product improvements, the specifications in this product data sheet are subject to changes without prior publication. This data sheet is not allowed to be used for deriving any rights, and AVANCIS does not accept any liability with regard to and resulting from the use of information contained herein. Installation equipment is not supplied with the product.

Standard packaging:

Packaging information

Measurements including pallet	L 1,650mm x B 800mm x H 1,000mm
Approx. gross weight (full box)	374 kg
Modules per box	20
Maximum no. of stacked boxes	1 on 1 (batch of 2)
Max. truck loading (24t)	48 (3 x 8 + 3 x 8)
Max. 40ft container load (24t)	28 (1 x 14 + 1 x 14)

Variation of packaging sizes on individual request.



AVANCIS GmbH
Solarstraße 3, 04860 Torgau, Germany
T +49 (0) 3421 7388-0
info@avancis.de

www.skalafacade.com

AVANCIS  CNBM